

Logo here

SAFETY STATEMENT

ABC Company

Address Line 1

Address Line 2

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	1

Contents

PART 1	Company Statement
1.1	Application
1.2	Objectives of the Safety Statement
1.3	Company Safety Statement
1.4	Policy
1.5	Revisions
PART 2	Duties and Responsibilities
2.1	Management control
2.2	Manager 2
2.3	Manager 1
2.4	Supervisors
2.5	Employees
2.6	Contractors
PART 3	Arrangements for Safe Working
3.1	Resources
3.2	Safety Induction
3.3	Training
3.4	Safety Consultation
3.5	Safety Representation
3.6	First Aid
3.7	Reporting of Accidents, Diseases and Dangerous Occurrences
3.8	Welfare Facilities
3.9	Personal Protective Equipment
3.10	Smoking Policy
3.11	Drugs and Alcohol Policy
3.12	Bullying Policy
3.13	Young and Inexperienced Workers Policy
PART 4	Hazard Identification and Control Measures
4.1	Hazard Inspections
4.2	Fire
4.3	Access and Egress
4.4	Housekeeping
4.5	Manual Handling
4.6	Electricity
4.7	Offices
4.8	Visual Display Units
4.9	Hazardous substances
4.10	General Maintenance Work
4.11	Working at Height (Racking, Storage, etc.)

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	2

4.12 Company Vehicles & General driving Hazards

4.13 Ladders

4.14 Working in warehouse/stores

4.14.1 Racking and shelving

4.15 Hand Pallet trucks

4.16 Forklift trucks

4.16.1 Forklift Trucks Attachments

4.17 Pallets

4.18 Tractor

4.19 Battery charging/

4.19.1 Gas change

4.20 Coupling/Uncoupling trailers

4.21 Workplace Transport

4.22 Plastics collection activities

4.23 Bio hazards

4.24 Plastics Shredding

4.25 Conveyer

4.26 Wash Plant Extruder

PART 5 Annual Report

PART 6 Staff sign off

PART 7 Appendix

A1 Accident Report Form

A2 Safety Inspection sheet

A3 Staff Suggestion form

A4 Health and Safety Asset/Year Planner

PART 8 Related Policies

- Environmental Policy
- Equality Policy

Disclaimer:

This Statement has been prepared with the assistance of www.safety-statements.ie no liability may attach to www.safety-statements.ie arising out of any element of the contents of this statement. It is accepted that Manager 2 is responsible for ensuring the contents adequately reflect the activities of the business.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	3

Logo here	ABC Company
	Safety Statement

1.1 APPLICATION

This Safety Statement has been developed to assist ABC Company comply with relevant H&S standards and to ensure that clients and employees are fully aware of ABC Company's commitment to high standards in H&S.

We are a company specialising in the recycling of waste plastics into plastic beads for supply to the plastics processing industry. We have tried to address the known day-to-day Hazards and Safety Controls within this Safety Statement. However as new hazards are identified either by our H&S inspections or observations by staff, the relevant control measures will be updated and added to as necessary.

1.2 OBJECTIVES OF THE SAFETY STATEMENT

To provide a reference for the policies and procedures used in house. It is also used to assess and audit the levels of health and safety being achieved.

To provide evidence that the policies and procedures to ensure health and safety objectives are met and have been thought out and documented in order to help those who must execute them.

To provide a control document to record the pertinent changes to the Company Safety Statement, which become necessary due to the changing business environment.

To help identify training requirements that needs to be fulfilled in order to generate suitably qualified personnel to carry out the policies and procedures contained within the document.

To provide assurance that compliance with legal requirements for health and safety are being met or exceeded.

Revision number	Date	Document owner	Approved by	Page number
01	xx / xx / xx	Manager 1	Manager 2	4

Logo here

ABC Company

Safety Statement

1.3 COMPANY SAFETY STATEMENT

The general Statement on this page sets out the Safety Policy of ABC Company.

It is this Company's intention that its work will be carried out in accordance with the relevant statutory provisions of the Safety, Health & Welfare at Work Act 2005, the Safety, Health & Welfare at Work (General Application) Regulations, the Construction Regulations and any other applicable regulations from those implemented in 2007. All reasonable practicable measures will be taken to minimise risk to employees or others who may be affected by company activities.

Manager 2 has appointed Manager 1 as having responsibility for managing Health, Safety & Welfare. Reference should be made to Manager 1, in the event of any difficulty arising in the implementation of this policy. Manager 2 will have ultimate responsibility for ensuring that the provisions of this Safety Statement are implemented.

The Success of the policy will depend on the co-operation of all employees. It is therefore important that you acquaint yourself will all areas of the Safety Statement. You should ensure that you understand your role and the overall arrangements for Health & Safety within the Company and within your individual area. You should also be aware that you have an obligation to take care of your own safety and that of others that might be affected by your actions.

Signed: _____
Manager 2

Date: _____

Revision number	Date	Document owner	Approved by	Page number
01	xx / xx / xx	Manager 1	Manager 2	5

1.4 Policy Statement:

ABC Company is committed to, protecting the Safety, Health and Welfare of all employees at work, avoiding product loss, preventing property damage and ensuring its processes will not damage the environment. All reasonable and practicable steps to protect members of the public who may be affected either directly or indirectly by its activities will be followed.

All reasonable and practicable steps shall be taken through occupational risk assessment to ensure that workplace conditions, practices and procedures are safe and in compliance with relevant safety, health and welfare legislation.

All employees shall be adequately trained, supervised and equipped to carry out their duties and responsibilities in a safe manner, with all operating procedures clearly outlined. All employees will have access to the company's safety statement and should ensure that they are familiar with its content.

Where necessary employees shall be provided with suitable protective clothing, equipment and training where hazards cannot be eliminated using all reasonable practicable steps.

Accidents/incidents reported shall be investigated by ABC Company to determine the corrective action necessary to prevent recurrence.

This statement shall be revised as often as is necessitated by changes in legislation or the addition of new processes and equipment and all resources shall be provided to ensure its full implementation.

Revision number	Date	Document owner	Approved by	Page number
01	xx / xx / xx	Manager 1	Manager 2	6

The table below is a record of all revisions made to the safety Statement

[illegible]

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	7

STRUCTURE FOR HEALTH AND SAFETY

PART 2

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx / xx / xx	Manager 1	Manager 2	8

2.1 MANAGEMENT CONTROL SYSTEM

ABC Company is a distribution business operating from a purpose built Distribution Centre/Warehouse.

The companies' employees operate an average of 40 hours per week from 6:00am to 5:00pm. However this is subject to change depending on customer needs

The objective of the Safety Management System is to satisfy our legal responsibilities and to exercise greater control of health and safety within our organisation, to protect people and control the business.

Management points that may be measured:


1. Workplace safety and housekeeping inspections
2. Staff suggestions and query forms
3. Induction and ongoing training
 - 3.1. First aid – as necessary
 - 3.2. Manual Handling – as necessary
 - 3.3. Safety Induction.
4. Safety critical equipment maintenance records
 - 4.1. Vehicles
 - 4.2. Fire extinguishers
 - 4.3. Hand tools
5. Fire drill records
6. Risk assessments
 - 6.1. Initial assessments from xx/xx/xx
 - 6.2. Annual reviews after xx/xx/xx
7. Monthly Safety review (part of general management meetings)
 - 7.1. Minutes
 - 7.2. Action points
 - 7.3. Outstanding issues resolved
8. Safety Statement
 - 8.1. Implementation after xx/xx/xx
 - 8.2. Annual reviews after xx/xx/xx
9. Annual report

Records of all of the above points will be held within a Safety Management Folder. This folder is maintained by Manager 1.

Revision number	Date	Document owner	Approved by	Page number
01	xx / xx / xx	Manager 1	Manager 2	9

Health and Safety Management process for ABC Company

Process flow below indicates how Health and Safety issues and procedures are handled.

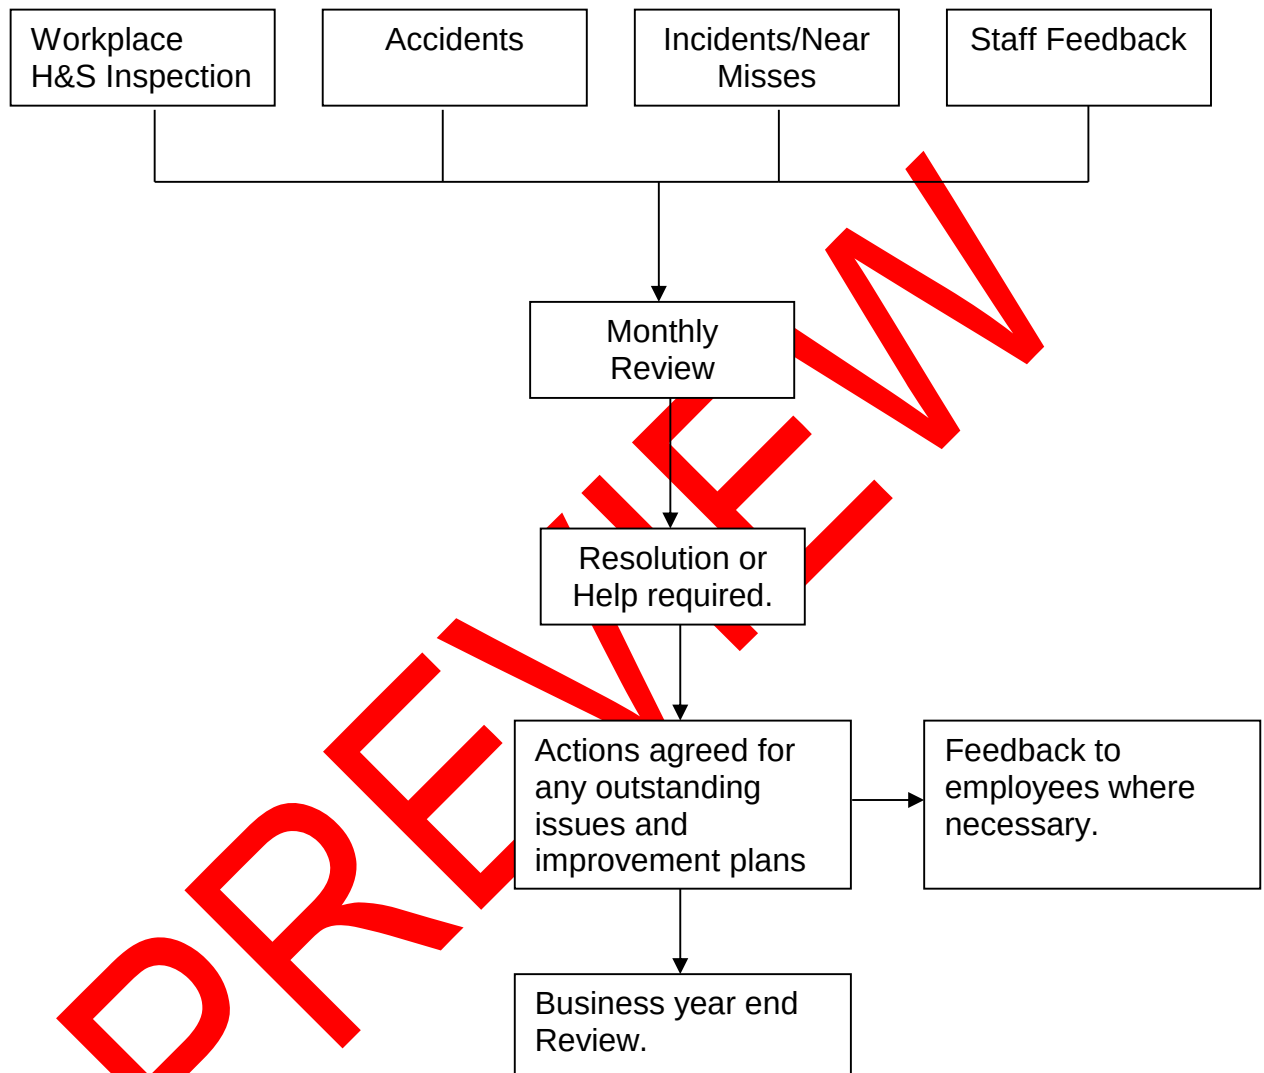

Revision number	Date	Document owner	Approved by	Page number
01	xx / xx / xx	Manager 1	Manager 2	10

2.2 Manager 2

- ❑ Manager 2 will be responsible for implementation of the procedures within the Safety Statement.
- ❑ Manager 2 bears the ultimate responsibility for ensuring that staff are given correct information and training for them to do their job effectively.
- ❑ Manager 2 is also responsible for ensuring that staff are supported in enabling them to reach the correct decisions in respect of health and safety matters.
- ❑ Supervise the Company Health and Safety programme.
- ❑ Review all safety rules bi-annually and, when necessary, recommend suitable changes.
- ❑ Investigate all major accidents and damage to Company property and recommend action.
- ❑ Ensure that accident records are maintained.
- ❑ Ensure that records of hazards/near miss reports are maintained.
- ❑ Ensure that the systems for ensuring that fire precautions are adequate.
- ❑ The Health, Safety, and Welfare of all employees are not compromised when all other performance standards are set.
- ❑ That adequate funding is reserved to meet regulatory needs of safety and health.
- ❑ That management will lead by example in adhering to stated policies to achieve the Company's aim to reduce accidents and health exposures.

Revision number	Date	Document owner	Approved by	Page number
01	xx / xx / xx	Manager 1	Manager 2	11

2.3 Manager 1

- ❑ Regularly inspect the workplace to ensure that the programme is being complied with and make recommendations directly to all employees in matters concerning Health and Safety.
- ❑ Ensure the review of Health and safety at the Management meeting.
- ❑ Review the Staff suggestion and query forms weekly.
- ❑ Control Sub-contractor work on the premises. (when necessary)
- ❑ Supervise the Company Health and Safety programme.
- ❑ Get the assistance of all management in monitoring the effectiveness of the Company Safety Statement.
- ❑ Review all safety rules on a regular basis and, where necessary, recommend suitable changes.
- ❑ Assist in the induction and safety training of new employees.
- ❑ Inspect and maintain records of hazards/near miss reports.
- ❑ Monitor the systems for ensuring that fire precautions are adequate.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	12

2.4 Supervisors

All supervisors will be responsible for planned implementation of effective health and safety standards within their area of operation.

Supervisors bear the responsibility for ensuring that staff are given correct information and training for them to do their job effectively and that their work targets are realistic and do not compromise health and safety requirements.

They are also responsible for ensuring that staff reporting to them are supported in enabling them to reach the correct decisions in respect of health and safety matters.

SPECIFIC RESPONSIBILITIES OF ALL SUPERVISORS

- ❑ Ensure that all procedures are complied with for all new employees.
- ❑ Implement an efficient communication procedure so that all Personnel are aware of workplace standards as measured against the Company's Safety Policy and are provided with information on accidents and other safety, health and welfare information.
- ❑ Plan and co-ordinate safety training as necessary.
- ❑ Plan and supervise all work processes in a safe manner and in accordance with the standards set out in the Safety Statement.
- ❑ Ensure that all employees directly under your control are aware of their specific responsibilities.
- ❑ Provide assistance to staff in carrying out their responsibilities, particularly in determining the most appropriate order and methods of working.
- ❑ Where work is of a nature not normally carried out by the Company, then identify hazards and, if necessary, arrange for written instructions to be issued, regarding safety sequence, method of work and precaution to be taken, to the person in charge of the work.
- ❑ Allocate work in such a way that health and safety standards are not compromised.
- ❑ Know the location of the First Aid Box.
- ❑ Ensure that you know the procedure in the event of a fire.
- ❑ Report any accident or damage, however minor, to senior management.
- ❑ Commend Employees who by action or initiative eliminate hazards.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	13

2.5 All Employees

- ❑ All Employees are to co-operate with management in the wearing of the correct safety equipment, using the appropriate safety devices and following proper safe systems of work.
- ❑ All Employees are to co-operate in the investigation of accidents and the reporting of them and also the reporting to their supervisors of any local hazards of which they become aware.
- ❑ All Employees will be encouraged to promote ideas on the improvements of health and safety standards and also provide suitable suggestions for reduction in risks.
- ❑ All Employees are forbidden to interfere with or misuse any specified items of safety equipment or any safety device.
- ❑ All Employees are required to take care of their own health and safety and they should not indulge in horseplay, wilful unsafe acts or carry out or play practical jokes on other employees.
- ❑ Employees found guilty of wilful unsafe acts may be liable to summary dismissal.
- ❑ Employees are advised that strict requirements under the Health and Safety at Work Act can be used by the enforcing authorities against such persons if found guilty of reckless behaviour.
- ❑ All employees must clean up their working area or assist in tidying up thereof and also to help maintain clear passageways and maintain high standards of local housekeeping and hygiene.
- ❑ Do not smoke in designated "No Smoking" areas and dispose of spent matches, cigarette ends etc. properly.
- ❑ Know the location of the First Aid Box.
- ❑ Ensure that you know the procedure in the event of a fire.
- ❑ Report any accident or damage, however minor, to management.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	14

2.6 SUB CONTRACTORS

The following responsibilities are allocated to contractors to whom ABC Company assigns work:

- All contractors must submit their Safety Policies and Insurances to ABC Company for approval prior to being awarded any sub-contract work.
- All Contractors will be expected to adhere to the highest standards of safety and ensure that their vehicles are DOE certified as necessary.
- All contractors will be expected to comply with the ABC Company Policy for Health, Safety and Welfare and must ensure that their own Company's policy is made available to the ABC Company whilst work on our behalf.
- All ancillary equipment on sub-contractor vehicles such as Tail Lifts, Moffit Mounties, Cranes, etc. must be properly certified and in good working order.
- Any injury sustained by a Sub-Contractor's employee or any RTA that a sub-contractor's employee is involved in while delivering on behalf of ABC Company, must be reported immediately to management at ABC Company.
- Sub-Contractors must comply with any safety instructions given by ABC Company management.
- All employees of the Sub-Contractor who will be engaged in driving must adhere to the correct usage of Tachographs as necessary.
- All employees of the Sub-Contractor must hold the relevant qualifications such as ADR, CPC, etc.
- ABC Company must see originals of all Driving Licences for any employee of a Sub-Contractor before driving on behalf of ABC company. ABC Company will retain copies of these licences.
- ABC Company reserve the right to have any employee of a Sub-Contractor assessed as a driver and to refuse work for that sub-contractor if the driver is not satisfactory.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	15

Logo here	ABC Company
	Safety Statement

ARRANGEMENTS FOR SAFE WORKING

PART 3

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	16

Logo here	ABC Company
	Safety Statement

3.1 RESOURCES

ABC Company recognises that for the effective implementation of the safety procedures and policies laid down in this Safety Statement, adequate resources and funding must be made available.

ABC Company undertakes:

- To ensure that adequate numbers of suitably trained staff are available to undertake all work activities carried out by the company.
- To include health and safety considerations into all annual estimates for the running of the company.
- Undertake that in so far as is reasonably practicable resources shall be made available for any upgrading, maintenance, replacement and repair of facilities
- Undertake to provide resources for the ongoing monitoring of health and safety and for the provision of information and training of all staff in health and safety.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	17

3.2 SAFETY INDUCTION

This procedure will be carried out by ABC Company at the work place where the new employee will be required to work.

Apart from explaining to the new employee what he/she will be required to do and to whom he/she will be directly responsible the following points require highlighting:

1. Show new employee where the Safety Statement is kept, explain its purpose and ensure that the employee is aware of his/her responsibility.
2. Advise new employee of any potentially dangerous areas in the work place.
3. Warn new employee of any prohibited actions in the work place, e.g. operating machinery unless authorised to do so.
4. The training and instruction required for each individual must be considered. The supervisor will arrange for specific training to be given to an employee.
5. Show new employee the location of the First Aid Box and explain the procedure in the event of an accident, in particular the necessity to record accidents, however trivial they may appear at the time.
6. Demonstrate to the new employee the fire and evacuation procedure and assembly points.
7. Instruct the staff member in relation to any job specific risk assessments.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	18

3.3 TRAINING

HAZARDS

Inadequately trained staff are a hazard to themselves and their co-employees. ABC Company shall identify the training needs of their staff and ensure they are fulfilled.

It is the Policy of ABC Company that every employee will receive safety training on an ongoing basis. All new personnel will receive safety training as part of their induction. Staff training is not only concerned with imparting facts but also with notifying staff to face up to their responsibilities and to be equipped to deal with emergencies.

Training will include safety induction and safety awareness, manual handling training and First Aid training.

ABC Company will keep training records to include:

1. Name of the employee being trained.
2. Date of training.
3. Training details.
4. Signature of the trainer and employee to ensure that the training has been carried out, documented and understood.

Staff will be trained to spot and act on hazards and encouraged to consult with management on health and safety issues.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	19

3.4 SAFETY CONSULTATION

Section 13 of the 2005 Act places a general obligation on ABC Company as employer to consult with and to take account of any representations made by the employees for the purpose of giving effect to its statutory duties.

To facilitate consultation on issues relating to the individuals safety at work, the company operates a Suggestion or Query form.

A folder of blank forms is held in the main office. Staff members complete a form as needed. The forms are reviewed on a weekly basis by ABC Company.

ABC Company will seek more information as necessary from the relevant staff member and will then agree any actions arising from the Suggestions or Concerns if necessary.

3.4.1 SAFETY COMMITTEE

ABC Company have a Safety Committee on site. The members of the Safety Committee are Manager 1, Manager 2 and an Employee Representative. The committee meet on the first Monday of every month. The following is the agenda for each meeting:

- Review previous month's inspections.
- Review any reported accidents or incidents form the previous month.
- Review any suggestions or queries from staff.
- Plan a safety topic briefing for the coming month.
- Review any new safety guidelines/legislation that ABC Company have been made aware of.
- Post the minutes on the Staff Notice Board.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	20

3.5 SAFETY REPRESENTATION

In agreement with the 2005 Act the employees may select and appoint a person, to be called a Safety Representative, from their numbers at their place of work to represent them in consultations with ABC Company.

However, at the moment, it has not been necessary to elect a Safety Representative. As the company grows it is accepted that this position may change.

The rights of the Safety Representative include:

1. Information from the employer as necessary and particularly from the Safety Statement, to ensure the Safety Health and Welfare of employees.
2. To be informed by the employer of a visit by the H.S.A. Inspector.
3. Investigate accidents and dangerous occurrences provided it does not interfere with the performance of any statutory obligation required to be performed by any person.
4. Make representations to and receive advice from the H.S.A.
5. Carry out inspections and investigate hazards and complaints subject to agreement.
6. Accompany a H.S.A. Inspector on any visit except when this is for accident investigation.
7. Time off as may be reasonable to act as Safety Representative or to acquire the knowledge to carry out that function.

ABC Company will facilitate the Safety Representative in carrying out their functions as defined in the Act and as outlined above.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	21

3.6 FIRST AID

CONTROL MEASURES

The first aid box should be suitably marked and easily accessible.

The exact location of the First Aid box must be known by all employees and a specific notice, identifying its whereabouts, must be posted to include names of qualified First Aiders.

It is the company's policy that First Aiders shall be appointed who have certificates of qualifications in Occupational First Aid to ensure adequate cover for all activities.

The first aid boxes are suitably marked and easily accessible. The location is follows;

- ❑ On site in Depot
- ❑ The First Aid Boxes is inspected on a weekly basis by the driver. This check and replenishment is recorded and kept on file.
- ❑ When employees are carrying out an installation/delivery at a Client premises, they shall seek the advice and assistance of the Client First Aider if necessary.
- ❑ It should be noted that First Aiders are not empowered to dispense analgesics, pills, or medications. Supplies of such items will not be in first aid boxes. Individual employees who believe they might have a need of these items must be responsible for their own supplies.

First aider names:

The following contents are required in a first aid box:

- ❑ Card giving general first aid guidance.
- ❑ Individually wrapped sterile adhesive dressings.
- ❑ Sterile eye pads, with attachment, e.g. Standard Dressing No. 16 BPC.
- ❑ Triangular bandages (sterile).
- ❑ Safety pins.
- ❑ Blue Plasters
- ❑ A selection of Unmedicated wound dressings which should include:
 - ❑ Medium size sterile unmedicated dressings (approx. 10cm x 8cm, e.g. Standard Dressings Nos. 8 and 13 BPC).
 - ❑ Large size sterile unmedicated dressings (approx. 13cm x 9cm, e.g. Standard Dressings Nos. 9 and 14 BPC and the Ambulance Dressing No. 1).
 - ❑ Extra large sterile unmedicated dressing (approx. 28cm x 17.5cm, e.g. Ambulance Dressing No. 3).
- ❑ It is also recommended that a pair of latex gloves be included in each first aid kit for use by the first aider.

PROCEDURE & RECORD KEEPING

- ❑ In the event of an accident, a qualified first-aid person will be responsible for dispensing any first aid material.
- ❑ All issues of first aid consumables and the relevant treatment must be entered on the accident report form.
- ❑ The relevant trained first-aid person with Manager/Supervisor on duty will be responsible for completing the form.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	23

3.7 REPORTING OF ACCIDENTS, DISEASES AND DANGEROUS OCCURRENCES

All accidents and dangerous occurrences must be reported.

- ❑ Accident report Form
 - ❑ The accident report form must be completed for all accidents. Copies of this form are available from the Foreman.
- ❑ Health & Safety Authority
 - ❑ If an accident occurs either at the place of work or related to a place of work or work activity and causes loss of life to a person who is employed by the Company or disables any person for more than three days from performing his/her normal duties of employment, then written notice must be given to the Health and Safety Authority by ABC Company.
 - ❑ If the accident is fatal, then the scene of the accident must be left undisturbed for three days after notice has been given, other than for rescue purposes.

CONTROL MEASURES

- ❑ All Accidents, near misses and Dangerous Occurrences
 - ❑ Management, in consultation with the First Aid person, will decide upon the immediate action required in the event of an accident. A medical opinion should be sought in all but the most trivial of injuries.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	24

Logo here	ABC Company
	Safety Statement

3.8 WELFARE FACILITIES

Adequate toilet facilities shall be provided and maintained in a good clean hygienic condition.

Adequate washing facilities and washing and drying materials/equipment shall be provided and maintained.

Arrangements for eating foodstuffs shall be provided in the form of a canteen/tea room facility on the premises.

An adequate supply of drinking water shall be provided on the premises.

Adequate cloakroom facilities shall be provided for the storage of wet coats, etc.

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	25

3.9 PERSONAL PROTECTIVE EQUIPMENT

ABC Company shall ensure that all employees use Personal Protective Equipment where required.

HAZARDS

- Physical Exposures
- Chemical Exposures
- Machine exposures

CONTROL MEASURES

All safety equipment purchased by the Company will be to approved standards.

ABC Company will ensure that adequate supplies of all the necessary protective clothing and equipment is available for issue as required and that when issued to employees, a signature is obtained for the equipment.

Management will inform any person in the workplace observed carrying out any procedures which require the use of protective clothing or equipment of both statutory and Company Policy requirements and such persons will be instructed not to continue working until protective clothing or equipment is obtained and used. This applies not only to all employees (including management) but also to contractors.

All PPE is signed for upon issue and replacement PPE may not be issued unless the damaged item has been returned for inspection.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	26

3.10 SMOKING POLICY

The Public Health (Tobacco) (Amendment) Act 2004 became law on Monday 29th March 2004. This means that smoking will not be permitted in any enclosed workplace.

In order to comply with the above legislation and for other Safety and Health reasons, it is the policy of ABC Company that all of our work areas are smoke free. The Organisation recognises that all employees have a right to work in a smoke free environment. All staff have a legal obligation to comply with the legislation. Smoking is prohibited throughout the workplace with no exceptions. This policy applies to all employees, trainees, consultants, contractors, customers and visitors who enter the premises of ABC Company.

Implementation

The overall responsibility for the implementation of this policy rests with the occupier, manager or other person designated, for the time being, in charge of the workplace. All staff have an obligation to adhere to, and facilitate the implementation of this policy.

The person in charge for the Client site (delivery location) is Client H&S Manager.

All new and prospective employees, consultants and contractors shall be given a copy of the policy on hiring, recruitment/induction by the person in charge.

Infringements

Infringements of the No Smoking policy will be dealt with, in the first instance, under employee disciplinary procedures. Employees, trainees, consultants, contractors, customers and visitors who contravene the law prohibiting smoking in the workplace are also liable to prosecution.

Smoking cessation

Information on how to obtain help quitting smoking is available from the National Smokers Quitline on callsave 1850 201203 or the Health Promotion Department of local Health Boards.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	27

Logo here	ABC Company
	Safety Statement

3.12 DRUGS AND ALCOHOL POLICY STATEMENT

ABC Company recognises that alcohol, drugs, or other substance abuse by individuals can have an adverse effect on their ability to perform work and consequently put themselves, the Company and others at significant risk.

All Employees, Contractors, Sub - Contractors and Visitors must be able to perform their duties whilst on company business, or when they are in Company premises/ work areas in such a manner that will not affect their safety or the safety of others by acts or omissions.

If the Company has reasonable grounds to suspect that an Employee or Contractor or Sub Contractor is under the influence of alcohol or drugs (illegal or misused legal substances), disciplinary action will be taken which may lead to dismissal of the individual concerned.

The possession, distribution or sale of drugs or any associated materials whilst you are on company property, company owned vehicles or other off site locations, will lead to disciplinary action being taken.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	28

3.13 Bullying at Work Policy

ABC Company recognises and accepts its responsibilities as an employer to provide a safe and healthy working environment for employees. As part of the policy of maintaining good employer practice, ABC Company wishes to clearly state that bullying of any kind will not be tolerated.

Bullying at work is defined as: 'Persistent criticism and personal abuse, both in public and in private which humiliates and demeans the individual, gradually eroding their sense of self. Bullying can be best described as repeated inappropriate behaviour, whether verbal, physical, or otherwise, conducted by one or more persons against another or others, at the place of work and/or in the course of employment, which could reasonably be regarded as undermining the individual's right to dignity at work. An isolated incident of the behaviour described in this definition may be an affront to dignity at work, but as a once off incident is not considered to be bullying.

ABC Company will strive to ensure that all employees are free to perform, their work in an environment, which is free from threat, harassment and intimidation. All complaints of objectionable or offensive behaviour should be made to ABC Company or the Safety Representative.

Manager 2 gives the undertaking that he will investigate all complaints sensitively and will resolve locally, if possible, the source and cause of the bullying behaviour. If the circumstances warrant it, the Company will not be deterred in invoking the formal disciplinary / grievance procedures.

All employees are invited to strive in ensuring that our working environment remains a pleasant and friendly atmosphere.

3.14 Young persons and inexperienced workers policy

ABC Company does not employ under 18s. ABC Company does not employ inexperienced workers. ABC Company do not offer work experience places to local schools, colleges, etc.

New employees who are experienced in their profession/trade receive in-house induction training and spend an agreed period of time working with experienced staff before being allowed to operate alone.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	29

Logo here	ABC Company
	Safety Statement

HAZARD IDENTIFICATION AND CONTROL MEASURES

PART 4

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	30

4.1 HAZARD INSPECTIONS

The management of the Company recognises that its activities and premises may present Health and Safety risks and shall identify the areas where control measures are required. Identification of hazards shall be undertaken at regular intervals and management shall take all practicable control measures to reduce the risks to its staff and visitors.

Hazards will be identified, risk assessments made and categorised as per our risk assessment formula.

HAZARD IDENTIFICATION AND RISK ASSESSMENT

- ❑ The policy of the Company is to identify hazards in the place of work and to assess the risk to Safety and Health and to control risks as far as is practicable so that they are reduced to an acceptable level.
- ❑ “Hazard” is taken to mean “any substance, article, material or practice, which has the potential to cause harm to the Safety, Health or Welfare of employees at work.”
- ❑ “Risk” is taken to mean “the potential for the hazard to cause harm in the actual circumstances of use.”
- ❑ Risk Assessment is based on the linking of the probability of occurrence with the severity of loss and/or injury. In this exercise, risks are graded “High,” “Medium” or “Low” and numerically rated using the formula below. This is to help with the giving of priority to the employment of controls and the allocation of resources.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	31

The formula to be used for conducting risk assessments, assessing the risk from observed infringements/hazards or after an Audit, is shown here. Very minor injuries should score 1 while very serious ones will score higher, personal judgement is needed here. Likewise with the likelihood, 1 is very unlikely that anybody would be exposed to the hazard, while 7 means definite exposure to the hazard. Again personal judgement is needed.

Once the two scores are agreed they should be multiplied, thus giving a risk rating between 1 and 42.

Scores:

1-6 = Very Low risk

7-12 = Low Risk

13-18 = Low to Medium Risk

19-24 = Medium risk

25-30 = Medium to High Risk

31-36 = High Risk, stop the activity and implement immediate controls.

Over 36 = Very high Risk, stop the activity and implement immediate controls.

Risk Calculation Matrix

	How likely is an injury						
How serious will the injury be	1	2	3	4	5	6	7
1							
2							
3							
4							
5							
6							

Notes:

Hazards = Things that can cause an injury.

Risk = The likelihood of an injury happening.

- ❑ Risk Control measures are intended to reduce the risk to an acceptable level.
- ❑ Where practicable the Company commits itself to the elimination of hazards, whether that is by the provision of access arrangements, machine guarding or the provision of special tools etc.

This approach will take into account normal good practice within this sector of industry and the standards and guidelines where these are available.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	32

Logo here	ABC Company
	Safety Statement

4.2 FIRE

FIRE HAZARDS

The fire safety arrangements for ABC Company are set out below.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

A Fire Safety Programme shall be developed when appropriate by management to:

- (a) Guard against an outbreak of fire
- (b) Ensure as far as is reasonably practicable the safety of persons (including members of the public) on the premises in the event of an outbreak of fire.

The Fire Safety Programme shall incorporate arrangements for:

- (a) The prevention of an outbreak of fire through the establishment of day to day fire prevention practices.
- (b) The instruction and training of staff to familiarise them with fire and emergency evacuation procedures, fire call points and use of fire fighting equipment.
- (c) Running fire and evacuation drills.
- (d) The provision and maintenance of escape routes, free from obstruction and all exits unlocked and operational.
- (e) The provision of adequate fire protection equipment and systems.
- (f) The inspection and maintenance of the fire protection equipment systems.
- (g) The provision of assistance to the fire authorities.
- (h) The maintenance of good housekeeping practice to ensure the removal of all combustible rubbish.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	33

- (i) The testing and maintenance of portable heating appliances, and ensuring that all electrical equipment is switched off and unplugged when not in use.

4.2.1 FIRE FIGHTING EQUIPMENT

The purpose of portable fire fighting equipment is as follows:

1. Extinguish incipient fires
2. Protect means of escape in case of fire
3. Protect employees and visitors
4. Protect property.

Portable Fire Extinguishers

Portable fire extinguishers will be provided in sufficient numbers to give adequate cover as per the advice of our Fire Protection Company.

Action in the event of fire

1. Clear everyone from the immediate vicinity of the fire except those actually authorised to engage in fire fighting.
2. Alert other staff in the immediate area of the fire. Contact the Fire Brigade, giving them the address clearly and any other directions necessary.
3. If there is no danger by doing so, try to put out the fire with the apparatus provided, but remember our equipment will only be effective on a small fire - you must catch it before it gets hold.
4. Use the break glass fire alarm.
5. The manager of the area will order evacuation of the building as soon as it becomes apparent that the fire or smoke is spreading.
6. Employees should not delay their departure to collect personal belongings from another part of the building and should assemble at the designated assembly point so that they can be quickly accounted for.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	34

Logo here	ABC Company
	Safety Statement

7. Make sure that the building is cleared of employees and visitors. Close doors. See that no unauthorised person enters the building.

4.2.2 MEANS OF ESCAPE IN CASE OF FIRE

It is essential that escape routes be established, clearly identified and maintained available for use and that the protection afforded them is not impaired in the operation of the premises.

No person shall obstruct a means of escape. Fire exit routes and doors must never be obstructed.

4.2.3 FIRE DRILL

Fire drills are undertaken twice per year. Records of the date of these drills are on the H&S asset. The drills are also reviewed at our Management meeting.

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	35

4.3 ACCESS AND EGRESS

HAZARDS

Inadequate access and egress facilities can result in:

- Restriction of an orderly evacuation of the premises
- Trips and falls
- Obstruction of emergency exits

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

All doors and access points shall be kept clear and maintained.

All passageways shall be kept clear of obstruction.

All floor covering and surfaces shall be kept clean and in good condition.

Adequate lighting shall be provided at all entry, exit points and along corridor and passageways.

Waste shall be removed regularly and systematically stored in a secure place until collected for disposal.

It is vital that all fire escape routes are not obstructed at any time.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	36

4.4 HOUSEKEEPING

HAZARDS

Poor housekeeping can pose a wide variety of risks to health and safety.

- Trips:- Materials left lying in the open
- Slips:- On a greasy floors, slippery material strewn around
- Falls:- Use of materials for accessing higher work areas.
- Collisions:- Blockage of access aisles with materials
- Objects falling on people:- Improper stacking of materials
- Fire:- Inadequately and infrequent disposal of combustible rubbish.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

Staff will ensure that access routes are planned, and storage is programmed to ensure that excess materials are not stored on site, storage areas are defined, staff/sub-contractors are made aware of the Company requirements with regard to storage, clearing up and tidiness.

Employees must maintain the workplace in a tidy condition at all times.

Supervisors will ensure that stacking areas are prepared and that materials are stored so as not to create difficulties.

Employees will ensure that all waste materials in and around the premises are cleared and disposed of safely.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	37

Logo here	ABC Company
	Safety Statement

4.5 MANUAL HANDLING

HAZARDS

- Incorrect method of lifting
- Attempting to lift something which is too heavy
- Lifting sharp/awkward shapes

The main injuries associated with manual handling and lifting are:

- Back strain, slipped disc.
- Hernias.
- Lacerations, crushing of hands or fingers.
- R.S.I.
- Bruised or broken toes or feet.
- Various sprains, strains, etc.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

Loads which must be manually handled shall be assessed on the basis of their risk to health and safety and due caution exercised where there is a risk of back injury etc. The method of handling shall take account of the size, weight, shape, condition and position of the load to be handled.

Where possible measures shall be taken to reduce the amount of manual handling to a minimum and mechanical handling devices supplied and used in so far as is reasonably practicable.

All appropriate staff shall be trained in safe manual handling techniques.

Where loads have to be manually handled, safe access shall be assured.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	38

Precautions

1. Manual Lifting Procedure

1. The Lift

The key factors in safe lifting are:

- a) balance
- b) position of back
- c) positioning of the arms and body
- d) the hold

a) Balance

Since balance depends essentially upon the position of the feet, they should be apart about hip breadth with one foot advanced, giving full balance sideways and forward without tension.

In taking up this position, lifting is done by bending at the knees instead of the hips and the muscles that are brought into use are those of the thigh and not the back.

b) Position of the Back

Straight - not necessarily vertical

The spine must be kept rigid and straight, but not necessarily vertical. The spine can be kept straight if it is within 15 to 20 degrees from the vertical. This, coupled with a bent knee position, allows the centre line of gravity of the body to be over the weight, so reducing strain.

c) Position of the Arms and Body

The further the arms are away from the side, the greater the strain on the shoulders, chest and back. The elbow must at all times be close to the body, arms should be straight when carrying a load. One hand should be in advance of the other, whichever foot is

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	39

placed forward, the same hand is extended, the other hand is kept close to the body. This position ensures that the elbows are into the sides. This coupled with the correct foot position ensures a safe and easy fit.

d) Arms close to the Body

The further the weight is away from the centre line of gravity of the lifter, the greater the strain. At all times get close to the weight and try to make it part of you.

e) The Hold

When grasping a weight, one often hears the phrase "get a good hold". A good hold means a grasp with the roots of the fingers, not just the tips, plus contact of the weight with the palm of the hand.

Never forget that size and build has no bearing upon the amount any one individual can lift. Everyone should know their own capabilities and should never attempt to exceed them. If in doubt get help, it is far better to be safe than sorry.

Besides these key factors, there are other important points to remember.

2. Centre Line of Gravity

It is essential that the weight of object and the centre line of gravity of the lifter should be as close as possible to one another. This reduces strain, discomfort and the likelihood of loss of balance during the course of the lift.

3. Testing the Weight

When in the initial position for the lift, the lifter should test the weight of the object to make sure it is within his capability and not too heavy for one man to lift. Many accidents happen when a person raises an object a few inches off the floor, realises it is too heavy and lets go.

4. The shape of the weight

Note the shape of the object. It should be turned, if possible, so that the shortest measurement of rectangle is nearer to the centre line of gravity.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	40

5. Movement.

The movement should be controlled and smooth. The weight should be kept close to the body.

Rhythm plays an important part in reducing tension and creating relation.

Before moving any loads, the job should be sized up and possible hazards moved or rectified.

An inspection of the load itself must be made to ensure that it can be moved without danger to the lifter or others.

The following check list can be usefully applied to all lifting jobs:

- if the load is heavy or too large for one person to handle, help should be obtained from a work-mate of similar physique
- jerking a load will add a little extra force, but it will also cause severe strain to the arm, back and shoulder
- even if a load is light in weight, it is dangerous to carry if it is large enough to obscure vision
- loads should not be pushed onto stacks above chest level. If a stack is this high, stand on a sturdy platform
- if the load to be lifted exceeds half the weight of the person lifting it, it is more than likely that the individual will lose his/her balance.

Note: if in doubt when lifting GET HELP.

TRAINING

Any employee whose job involves any manual handling shall be trained to allow him/her to carry this out safely. The extent of the training will depend on the type of lifting in which they are involved.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	41

4.6 ELECTRICITY

HAZARDS

- Electric Shock
- Fire
- Trips or falls from loose cables

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Dangerous or defective cabling should be replaced or remedied in accordance with the E.T.C.I.'s rules. It is important that all extensions, alterations and repairs to electrical circuits are carried out in a proper manner in accordance with E.T.C.I.'s rules.
- All new electrical installations and all extensions are tested and certified as safe, by a competent qualified electrician.
- Electrical installations are checked regularly by a competent qualified electrician.
- Testing, certifying and repairs are carried out in accordance with appropriate Electro Technical Council of Ireland (E.T.C.I.) standards
- Enclosures/covers are in place to prevent contact with live electrical equipment/parts.
- Damaged extension leads are repaired or removed from use.
- Means of cutting off power to electrical installations and equipment e.g. fuses, trip switches, are provided and employees are aware of their locations.
- Work on live electrical equipment is avoided where reasonably practicable.
- Fire extinguishers that are suitable for fighting electrical fires are provided.
- All circuits supplying socket outlets are protected by a Residual Current Device (RCD).
- Operation of the RCD is tested regularly in accordance with the manufacturer's instructions.
- Where electrical portable appliances are subject to ongoing wear and tear, they are inspected and tested.
- Any scorch marks associated with an electrical appliance or electrical wiring is checked urgently by a competent person.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	42

WIRING STANDARDS

Precautions to be included either are or will be as follows:

- All new fixed and temporary wiring will be to the latest Irish standards and, where practicable, in compliance with the national rules for electrical installations.
- All portable electrical equipment shall be tested annually by a competent person to ensure safety.
- Flexible cables will also be adequately protected against external mechanical damage.
- Flexible cables for portable equipment will be properly mechanically restrained within plugs and couplers.
- Enclosures, plugs etc. should be maintained as part of the portable appliance of which they form part, but damaged leads, plugs, etc. should not be allowed to remain in service should the equipment not be due for maintenance.
- A record should be kept of each item of equipment so that maintenance can be scheduled and recorded.
- Where appropriate all equipment not in use to be switched off, especially at the end of a working, unless of a specialist type, e.g. servers, etc.
- Sufficient sockets shall be provided to prevent overloading by use of adapters. Proper plugs shall always be fitted to electrical appliances and flex firmly clamped.
- Frayed and damaged cables shall be replaced immediately.
- Flexible cables should not be run across floors. Where damage at floor level to other cables is possible, protection by ramps, conduit or armouring will be considered and applied.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	43

Logo here	ABC Company
	Safety Statement

4.7 OFFICES

HAZARDS

- While office work may not be considered as a high-risk activity unsafe work systems and layout may result in injury or illness.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Adequate office space is allocated for the working personnel.
- All furniture, fittings and equipment shall be arranged so that staff can move about without collision with sharp corners of desks etc.
- Only one drawer of a filing cabinet shall be opened at any one time. All drawers should be closed after use.
- Sufficient lighting and ventilation shall be provided.
- Electric or telephone cables shall not trail unprotected across the floor. Cable covers shall be supplied and used.
- Chairs desks or drawer should never be used to access higher areas. Step ladders shall be used.
- All items stored above head level shall be stored properly to prevent falling.
- The mains power supply shall be disconnected before attempting to move electrical equipment.
- All damaged floor covering, furniture equipment or machinery shall be reported, replaced, or repaired.
- Before using chemicals (e.g. photocopier toners) read the instructions on the container and avoid contact with skin or clothing.
- Floor areas shall be kept clear of materials and litter.

Dangerous waste e.g. broken glass, shall be carefully disposed of

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	44

4.8 VISUAL DISPLAY UNITS (VDU'S)

HAZARDS

The main problems that may be associated with VDU's are as follows:

(a) Visual Discomfort

This recognises a contribution from a number of ocular problems:

- (1) long/short sight problems
- (2) glare
- (3) lighting
- (4) screen brightness
- (5) clarity of characters.

(b) Posture

Good adjustable seating is required and it is essential to consider ergonomic factors.

(c) Radiation

Radiation levels across virtually the whole of the electro-magnetic spectrum are below internationally accepted exposure limits when tested under extreme conditions, i.e. close to the screen.

(d) Stress

The work at a VDU can be repetitive and monotonous. This is not exclusive to VDU users as mental stress is associated with all types of work.

On the basis of available evidence, the 'health hazards' associated with VDU's are largely exaggerated in the sense that they are unlikely to cause irreversible long term damage as opposed to varying degrees of discomfort.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	45

Logo here	ABC Company	
	Safety Statement	

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Be sure that VDU screens meet the appropriate criteria for performance, brilliance, character design, etc.
- The intensity of the beam, the brightness of the dots against the background and their time persistence are the most important determinants of operator 'safety'.
- This underlines the importance of keeping VDU's in good condition.
- It is important that chairs are correctly selected and used and that their siting is at an optimum distance from the machine.
- Lighting, ventilation and temperature must be carefully controlled to provide satisfactory environmental conditions.
- There should be a restriction on continuous use:
- Over two hours with pauses of between 5-10 minutes before further use.
- In this respect, short, frequent intervals are more beneficial than infrequent long breaks.
- The total time of continuous work at a VDU should be restricted to 6 hours per day.
- Vision should be tested before operating a VDU and at yearly intervals, or earlier if symptoms are experienced. Spectacle wearers should consult their optician.
- Epileptics should see a medical adviser before starting work.

If there is any untoward incidence of VDU related problems medical advice must be sought.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	46

4.9 HAZARDOUS SUBSTANCES

HAZARDS

Health hazards from substances can be divided into the following categories:

- External contact - corrosive, skin absorption, dermatitis.
- Inhalation - gases, fumes, vapours.
- Ingestion - swallowing.

RISK ASSESSMENT

Likelihood	Severity	Risk Value
Score =	Score =	Result =

General Precautions

- Almost all chemical materials are potentially dangerous. Although they may find their way into day to day use, it is usually a very diluted or otherwise modified form. The following general rules should always apply:
- Chemical products must never be allowed to come into eye contact. Contact with skin and mucous membrane must likewise be avoided. Wear protective equipment and clothing supplied. Always observe good industrial hygiene practice.
- Do not swallow materials or use in areas where food is being consumed.
- Inhalation of chemical vapours or dust should be avoided.
- Adequate ventilation must be provided.
- Facilities for the washing and cleansing of the skin must be made available with the necessary cleansers and barrier creams.
- Store all products in ventilated areas away from extremes of temperatures and environment.
- Clean all spillages instantly and dispose of waste and used containers properly.
- Except for transport in closed packages, only authorised personnel must handle materials.
- Ensure the correct equipment for handling the products is available.
- If any person handling the materials shows the symptoms, which may possibly have been caused by exposure to chemical products, they should be removed from the area and medical advice sought without delay.
- Read the data sheet, container labels, and detailed health and safety information before using any products.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	47

4.10 General Maintenance work

Note: All large or non-standard work is subject to individual assessment and the production of a method statement to cover the tasks and activities of the specific job. This assessment only relates to issues such as changing bulbs, basic painting using domestic type paints, etc.

HAZARDS

- Multi hazard

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Each task will be assessed at the time and relevant controls will be put in place.
- Areas of exclusion will be set up to ensure no accidents may happen to third parties.
- Housekeeping practices will ensure that all areas are kept clean during the working day and the area will be left clear at the end of the working day.
- Where it is necessary to leave work unfinished at the end of a working day, relevant signage and/or barriers will be put in place.
- ABC Company employees do not engage in general electrical work.
- Work areas and machinery will be kept clean and tidy at all times.
- Work areas will be subject to the H&S inspections.
- Personal Protective Equipment comprised of Gloves, Knee Pads, Masks, Safety Boots and Hi Viz will be worn as relevant for the particular type of hazard.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	48

Logo here	ABC Company
	Safety Statement

4.11 Working at height – racking, storage, etc.

Hazards

- Items falling from work area
- Overreaching
- Tripping Hazards on work area
- Collapse of unit
- Falls from height

Person at risk:

Employees / Sub-Contractors / Visitors / Others

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Method Statement and Risk Assessment to be prepared before any work commences on a roof or at height.
- All man-up platforms/cages for forklifts etc. shall be fitted with relevant safety devices.
- All work at height will be must be carried out safely to protect workers and people below.
- PPE, training, Fall Arrest systems, etc. to be fully implemented and used as per the specifics of the relevant method statement.
- Effective cordons must be fitted to deter non-essential personnel.
 - o In some areas where this is not practicable operatives may be required to attach tools or small articles to cords so that they cannot fall.
- Portable access equipment, such as trestles, step-ladders and tower scaffolds, must not be positioned near stairwells or floor/roof edges if this places operatives at risk of falls.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	49

4.12 Company Vehicles – General Points

Hazards

- Personal Injury from inadequate maintenance / Checks on Company Vehicles
- Damage to property from inadequate maintenance / Checks on vehicles
- Road Traffic Accidents

Person at risk:

Employees / Sub-Contractors / Visitors / Others

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

Tachographs and Working time

It is expected that every driver will adhere totally to the legislation relating to Tachograph procedures. The company shall maintain a full record of Tachographs for inspection by any statutory body.

In accordance with working time regulations the company will ensure that all drivers are rostered in such a way as to comply with statutory rest periods.

Use of company vehicles

Five main hazards are addressed under the risk assessment: Road Traffic Accident, Refuelling, Wheel Change, Mobile Phones and Maintenance.

HAZARDS

1. Road Traffic Accident – Injury due to collision

RISK ASSESMENT: Medium

CONTROL MEASURES

Only suitably qualified and insured employees may operate company vehicles.

They must always be driven within the rules of the road and the law.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	50

They must have a recorded and scheduled programme of maintenance, and must hold DOE certificates as necessary.
No hitchhikers may be picked up at any time.
Any breach of Road Traffic Acts will be treated with the utmost severity.

2. Refuelling.

RISK ASSESMENT: Low

CONTROL MEASURES

All refuelling is carried out by people over 18 years of age.
Refuelling is only carried out in open air such as garage forecourts.
Fire extinguishers are always present on the forecourts.

3. Wheel Change – Cuts, Bruises, MH injury, traffic passing by.

RISK ASSESMENT: Low

CONTROL MEASURES

Smaller Company vehicles (cars) are issued with full wheel changing kits. HGVs are provided with an emergency call out facility.
Kit includes the jack, screwdriver, spare wheel and tyre iron. The reflective jacket, torch and red triangle are supplied by the company.

All of this equipment is to be properly maintained by the vehicle drivers.

If a puncture occurs and a wheel change is needed do the following:

- Turn on hazard lights
- Pull in to the left-hand side of the road when safe to do so
- Get out of the vehicle and go to the boot
- Place the red triangle approx. 30 feet from the vehicle
- It is imperative that the yellow jacket is worn even in broad daylight
- If the puncture is on the left hand side of the vehicle proceed to change the tyre taking great care with regard to manual handling
- If the puncture is on the right hand side of the vehicle try to angle the car slightly to give protection from oncoming traffic
- When the wheel has been changed replace all equipment back in the vehicle in their original storage places

Have the puncture repaired as soon as possible, especially if the spare is a temporary wheel

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	51

4. Mobile phones – road traffic accident

RISK ASSESMENT: Medium

CONTROL MEASURES

At no time is it permitted to drive the vehicle while holding a mobile phone or receiving / sending text messages

Training / instruction must be given to staff on the dangers of using a mobile phone while operating a vehicle

5. Truck Maintenance (company owned) – RTA due to poor maintenance

RISK ASSESMENT: Low

CONTROL MEASURES

Maintenance / service in place.

A bi-monthly Health & Safety Vehicle Review will be made on the van and a record kept in the Health & Safety folder

Staff will occasionally be requested to carry out an assessment on the van.

Van to include the following:

- Current Vehicle Service Record
- Fire Extinguisher
- Torch
- Reflective Jacket
- Bin for litter
- Warning Triangle
- Emergency Breakdown/Accident phone number
- First Aid Kit Accident number

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	52

4.13 Ladders

Hazards

Note: Ladders must only be used for short periods and only where there is no suitable alternative.

- Items falling from ladders
- Working from ladders
- Throwing waste material from ladders
- Overreaching
- Overbalancing
- Ladders Falling
- Falls from Ladders
- Electrocution
- Defective Ladders

Person at risk:

Employees / Sub-Contractors / Visitors / Others

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Ladders must be in good condition, free from defects and to be inspected by a competent person before ladder is to be used.
- Ladder must be positioned on solid ground - if metal check that caps on the feet are in place and in good condition.
- Ladders to be used the correct way up - strengtheners to be on the underside of rungs.
- Ladders should not be painted as this hides defects.
- The ladder must be sited on a level surface and securely tied on both sides near its upper resting place. If it cannot be tied at the top, it must be held by a person stationed at the foot of the ladder.
- Workers to climb ladders with both hands free (i.e. not carrying materials)
- Move ladder along with work to prevent overreaching.
- Only one person at a time on a ladder
- If a ladder cannot be properly repaired, it must be scrapped
- Do not stand on top 2 rungs of step ladder

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	53

4.14 WORKING IN WAREHOUSE/STORES

HAZARDS

- Poor housekeeping.
- Spillages/materials on floor.
- Materials falling from racking.
- Bad/dangerous forklift driving.
- Loading/unloading pallets manually.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Housekeeping cleaning duties must be carried out daily.
- All spillages should be cleaned up immediately.
- Restrict access to authorised personnel only.
- Safety signs are in place re "Caution Beware of Forklift."
- No obstruction to be put in way of exits.
- Only trained drivers to drive forklift.
- Safety boots worn by all staff.
- All shelving and racking shall be kept in good condition.
- Shelving and racking shall not be over loaded.

TRAINING

- Forklift driver training.
- Manual Handling.
- Safe working practices in Warehousing Areas.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	54

4.14.1 RACKING AND SHELVING

HAZARDS

- The main risks from the racking are from:
- Goods collapsing from stacks or tiers.
- Improperly stacked goods falling onto employees.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- All racking shall be inspected weekly by the warehouse staff as per the SEMA code of practice. All racking damage shall be reported to Supervisor/ Manager.
- All damage to racking and shelving shall be made good at the earliest possible opportunity.
- All floors shall be kept level and in good repair.
- If there is a risk of mechanical damage due to forklift truck collision, end frames must be adequately protected by means of motorway-type barriers or equally effective means.
- Do not attempt to straighten damaged sections.
- Climbing on racking is not allowed. Proper access procedures, i.e. the use of stepladders and ladders must be adhered to.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	55

4.15 HAND PALLET TRUCKS AND MHE

HAZARDS

- May cause serious accident and injury to other members of staff.
- Reversing against operator.
- Collision with employee.
- Material falling from load.
- Truck/ M.H.E. colliding with objects.
- Standing on pallet forks while in motion.
- Unsafe pallets/badly damaged pallets.
- Poorly maintained pallet truck.
- Wet floors.
- Carrying excessive weight.
- Pallet being dropped on to operator's feet.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Training of operators.
- Only trained personnel can use hand pallet truck/ M.H.E.
- Use of emergency stop button.
- Use horn of pallet truck/ M.H.E.
- No personnel allowed to stand on pallet trucks/ M.H.E
- Use pallet truck/ M.H.E. to lift maximum weight guidelines only.

TRAINING

- All operators to receive in-house training in use of pallet truck.
- All hazards associated with truck must be clearly identified to operators
- Correct handling procedure to all operators.

CONTROL DURING USE

- Always travel in reverse except when loading/unloading or when placing a pallet.
- Keep all body parts inside the confines of your M.H.E. when travelling.
- Do not dismount while M.H.E. is still moving.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	56

Logo here	ABC Company
	Safety Statement

- Sound horn when passing a pedestrian, when entering and exiting a loading bay and all blind spots.
- Do not carry passengers or ride on your M.H.E.
- Always travel at a safety speed to the area in which you are working.
- Always be prepared to stop.
- When travelling with a load, always lift fully, when exiting a pallet make sure you are fully down, and looking in the direction in which you are travelling.

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	57

4.16 FORKLIFT TRUCKS

It is the supervisors/managers responsible to ensure that no employee uses forklift truck, unless they have been properly validated by the Company.

HAZARDS

- A truck colliding with object/structure causing collapse of same.
- Equally hazardous is the practice of jumping from a truck while still in motion.
- Excess speeding in confined areas, restricted aisle-ways etc.
- Lack of attention can result in any of the following:
- Overturning.
- Persons being run over/struck by fork lift truck.
- Material falling from forks.
- A truck colliding with an object.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- The HSA "Code Of Practice for Rider Operated Fork Trucks" will be adhered to.
- Whenever practicable, internal transport and pedestrians will be segregated, by the provision of pedestrian doors at main access points and clearly delineated pedestrian access routes
- All fork lift trucks are fitted with:
 - Forward flashing warning light(s) interlocked with the ignition
 - Reversing horns/sirens interlocked into reverse gear.
- Floors are maintained in a sound and clean condition and particular attention is paid to the prevention of oil and rubber build-up. Specific cleaning chemicals are used by the hygiene team for the purpose of removing rubber build up..
- All parts and working gear of vehicles fitted with forks or any other attachments for stacking, loading or unloading goods must be thoroughly examined every six months.

Control during use

- Forklift drivers must on no account carry passengers on their vehicles unless that such vehicles are suitably modified with appropriate secondary seating etc.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	58

- Operatives, shall, under no circumstances position themselves between the load being delivered and a fixed obstruction e.g., pallet load and where possible barriers shall be provided to prevent encroachment by the lift truck into an operatives' work area.
- Keep blade approx. 4 inches off the ground with a slight tilt upwards when travelling.
- Operatives are never to be lifted on the forks.
- When lifting a pallet in a truck or off the floor or rack, always check your blade is not puncturing the pallet behind and that the load is stable or safe.

Training of drivers

- The training of drivers on all types of vehicle will be formal and under the control of a qualified instructor.
- Drivers will be trained on each type of vehicle they are required to drive if validated by the company.
- Trainee drivers will be tested at the end of the training period, and, if successful, will be issued with a special "driving licence" or other certificate.

Maintenance

- All our Forklifts are maintained by the supplier. Full records are held by the supplier and are available for inspection upon request. The annual statutory lifting gear check is also carried out by the supplier.
- All drivers carry out a Pre Use inspection using the HSA Poster and check list.
- Each operator must ensure that their forklift is safe to operate and free from defects.
- Any defects should be recorded and reported.
- Any safety critical defects must be rectified before the forklift is used.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	59

4.16.1 FORKLIFT TRUCK – ATTACHMENTS

It is the supervisors/managers responsible to ensure that no employee uses forklift truck, unless they have been properly validated by the Company. Failure to comply with this instruction is a dismissal offence.

HAZARDS

- Attachment comes free.
- Substances are released.
- Overloaded attachment.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- All attachments are subject to the relevant statutory and insurance checks on an annual basis.
- All drivers are fully trained in the safe use of the attachment and the correct procedure for handling items in the attachment.
- The Forklift and the Attachments will be placed in predetermined positions for mounting and demounting of the attachment.
- The selection of attachment will be in accordance with our Forklift Supplier's recommendations and the correct attachment will be used for each type of load i.e. Barrel Clamp, Sling, etc.
- The combination of the attachment and the load being lifted will not exceed the Safe Working Load (SWL) of the Forklift.
- Any securing devices for attachments will be checked by the driver before every use.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	60

4.17 PALLETS

HAZARDS

- Badly stacked pallets.
- Nails sticking out from pallets.
- Splintered wood on pallet.
- Blocks missing.
- Cross pieces missing from pallet.
- Stacking pallets too high in stores.

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

Before Use:

- Check that all pallets must be stacked neatly and squarely before lifting.
- Examine pallets for protruding nails or part nails.
- Reject pallets that are splintered are a hazard to finished product.
- Pallets with main blocks missing to be rejected as balance is missing
- Pallets with cross pieces missing to be rejected as they tend to belly in middle.
- P.P.E. (gloves) must be worn at all times.
- Always get help lifting pallets

TRAINING

- Manual Handling.
- Pallet quality training.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	61

Logo here	ABC Company
	Safety Statement

4.18 Tractor

HAZARD

HAZARDS

- Overturning causing entrapment beneath the tractor
- Persons being run over/struck by tractor
- Loose clothing catching in drive shaft
- Jumping from a tractor while still in motion.
- Excess speeding in confined areas.
- unauthorised/Inexperienced personnel having access to tractors and associated machinery

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

All tractors should be fully roadworthy

Tractor drivers being responsible for the up-keep of all aspects of the tractor, e.g. damaged seats should not be allowed to deteriorate to the point where possible injury could result.

Tractor drivers must on no account carry passengers on their vehicles unless that such vehicles are suitably modified with appropriate secondary seating etc.

All parts and working gear of vehicles fitted with forks or any other attachments for stacking, loading or unloading goods must be thoroughly examined every six months

Keys must be removed from the Tractors when not in use.

Guards should be over drive shafts at all times

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	62

4.19 BATTERY CHARGING AND GAS CHANGE (Forklift trucks)

HAZARDS

- Electrocution while charging batteries.
- Collision between forklift or truck and personnel at battery charging area.
- Burn caused by leaking batteries.
- Battery falling on to operator during battery change.
- Handling injury from gas bottles

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Truck is powered off and parked before removing gas bottles or connecting to charger.
- All bottles are stored outside.
- All operators fully trained in use of battery charging equipment.
- Gloves used when handling batteries and leads.
- All staff trained in good manual handling techniques.
- Only trained forklift drivers may carry out the charging/changing.

BATTERY MAINTANENCE

HAZARDS

The main hazards associated with battery maintenance are:

- Possible battery acid burns to skins eyes etc.
- Trapped limbs/hands during operation
- Electrical shock
- Exploding gases
- Ejection of electrolyte if overfilled
- Unsafe manual handling leading to injury to personnel or damage to equipment

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	63

CONTROL MEASURES

- Only trained and validated personnel may maintain batteries
- Procedure for safe maintenance of batteries must be adhered to at all times as per the suppliers instructions.
- P.P.E. e.g. aprons, gloves, face shield, overalls (disposable), must be worn at all times
- Maintenance file report updated each week and signed by the operative
- Eye Wash available at charging stations.

4.19.1 GAS CHANGE ON FORKLIFTS

HAZARDS

- Collision between forklift or truck and personnel at bottle changing area.
- Bottle falling on to operator during bottle change.
- Handling injury from gas bottles
- Static discharge and fire
- Carbon Monoxide Poisoning

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Truck is powered off and parked before removing gas bottles or connecting to fill point.
- All bottles are stored outside in an upright position.
- All bottle changing is carried out in the open air.
- Workplace is regularly ventilated to avoid any build-up of Carbon Monoxide (CO).
- All operators fully trained in use of changeover procedure by the Forklift Training company.
- Gloves used when handling bottles and making connections.
- All staff trained in good manual handling techniques.
- Bottles only purchased from approved sources.
- Full and empty bottles are segregated.
- All bottles are separated from sources of ignition.
- If connecting to a fill point the bottle/forklift must be grounded first.
- Suitable fire extinguisher in close proximity to the changeover point.
- All fill equipment and forklifts are serviced to reduce any risk.
- All forklifts are inspected as per our insurance and statutory requirements.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	64

- No smoking, hot works or naked flame in the vicinity of a change point.
- Information on the dangers of Propane Gas provided by our Gas Supplier and briefed out to staff.
- Propane vapour is heavier than air. Any gas escape will find its way to the lowest level. Gas vapour collecting in drains or vehicle inspection pits could possibly build up to an explosive or flammable mixture that will be extremely difficult to disperse. Therefore Gas Bottles are never to be stored near basements, pits, etc.
- Storage of cylinders should be secure to prevent tampering by unauthorised persons.
- Appropriate signage should be on display around the storage area to prohibit smoking and the use of naked flames.
- LPG cylinder storage areas must be at least 2 metres (NI) / 3 metres (ROI) from openings to cellars, drains or basements.
- The whole of the storage area must be maintained at ALL times and be free from weeds, long grass and waste materials.
- Storage areas shall be a safe distance from boundaries, buildings and fixed sources of ignition.
- Stored cylinders should not impede or endanger a means of escape.
- Electrical equipment within 2 metres of storage must be flameproof to the required standard.
- Suitable fire extinguishers (dry powder) should always be available in the storage area.

Info from Calor Gas:

EMERGENCY PROCEDURES

Action in Case of LPG Fire

- Raise the alarm. The Fire Brigade and Calor Gas should be notified immediately.
- Fires should normally be controlled but not extinguished until any source of gas escape can be cut off.
- If it is safe to do so, close tank valves in circumstances where a leak in pipework has ignited. Isolate all valves upstream and downstream to starve the fire of gas.
- A small fire can be dealt with using a dry powder fire extinguisher. Do not use water to extinguish LPG fires.
- Vessels should be cooled with water to prevent a pressure build-up.

Action in case of Gas Leak

- Raise the alarm. The Fire Brigade and Calor Gas should be notified immediately.
- Evacuate all persons, except those necessary to deal with the emergency.
- Whenever possible, and if it is safe to do so, turn off all isolation valves necessary to cut off or reduce the source or sources of escaping gas.

Revision number	Date	Document owner	Approved by	Page number
01	xx / xx / xx	Manager 1	Manager 2	65

4.20 COUPLING/UNCOUPLING TRAILERS

HAZARDS

The main hazards associated with coupling and uncoupling are:

- Unhitching
- Runaways

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES (sourced from HSE)

Coupling procedure for standard semi - trailers (where there is room to operate safely between the rear of the tractor cab and the front of the semi trailer)

- Slowly reverse the tractor unit in a straight line towards the front of the trailer.
- Apply the tractor unit parking brake, stop the engine and remove the keys.
- Check the trailer parking brake is applied.
- Make any necessary adjustments to the trailer coupling height and slowly reverse the tractor unit under the trailer until the 5th wheel jaws engage.
- Apply the tractor unit parking brake, stop the engine and remove the keys.
- Carry out a visual check that the 5th wheel jaws have engaged correctly and fit the security "dog clip" or other safety device.
- Carry out a second test that the 5th wheel jaws have engaged by selecting a low forward gear and with the trailer brakes still applied slowly pulling forward.
- Apply the tractor unit parking brake, stop the engine and remove the keys.
- Connect the service airline (yellow) and electrical connections.
- Connect the emergency airline (red) and watch for any unexpected movement. (If the trailer moves, immediately disconnect the emergency airline (red) and check that the trailer parking brake has been applied.
- Wind up the landing legs and secure the handle.
- Fit the number plates and check that the lights work.
- Carry out visual and functional vehicle checks, and release the trailer handbrake before setting off.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	66

Uncoupling procedure for standard semi trailers (where there is room to operate safely between the rear of the tractor cab and the front of the semi trailer)

- Park the combination in a straight line.
- Apply the tractor unit parking brake, stop the engine and remove the keys.
- Apply the trailer parking brake.
- Remove and stow the trailer number plate and lower the landing legs.
- Disconnect all of the air and electrical services and stow safely.
- Remove the security "dog clip" and pull the release handle to disengage the 5th wheel jaws.
- Slowly draw the tractor unit away from the trailer. If the tractor unit has mechanical suspension stop when the trailer is clear of the fifth wheel.
- Apply the tractor unit parking brake, stop the engine and remove the keys.
- Before leaving the trailer, walk round it to check that it is in a safe condition.

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	67

Logo here	ABC Company
	Safety Statement

4.21 Workplace Transport

Hazards

- People and vehicles colliding.
- Vehicles colliding with objects.

Risks Identified

Likelihood	Severity	Risk Value
Score =	Score =	Result =

Persons Affected:

Any staff or person waling through the yard, warehouse or making deliveries to customers.

Control Measures:

- Pre use inspection on Forklifts.
- Rider operated lift truck code of practice adhered to, see also section on forklifts.
- Safety boots worn by all staff working in warehouse.
- Hi-Vis vests worn in the warehouse.
- Hi-Vis vests ARE worn in the yard due to the possibility of low light levels and visiting HGV drivers.
- Office staff are not permitted in the warehouse except on specific warehouse business.
- The warehouse is never to be used as a short cut.
- Trailers are not uncoupled in the yard.
- Trailer parking is not permitted in the yard.
- Pedestrian areas and walkways marked on floors.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	68

4.21 Plastics Collection activities

Hazards

- Road Traffic Accidents
- Pedestrians
- Handling

Risks Identified

Likelihood	Severity	Risk Value
Score =	Score =	Result =

Control measures

- Each collection point will be assessed for specific hazards i.e.
 - o Pedestrians
 - o Residents
 - o Overhead services
 - o Vehicle access
 - o Entry to and exit from site
 - o Other observed hazards as per table below
- Drivers will be provided with a running sheet that shows the site specific hazards and what the relevant control measures are.
- All collection crews shall be trained in safe procedures and hand signals, etc.
- Liaise with the client to decide on the best and safest collection point.
- Avoid situations where reversing will be necessary.
- Make allowances for local unknown conditions i.e. road works, weather, traffic congestions, and children out on school holidays, etc.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	69

4.23 BIO HAZARDS

HAZARDS

Health hazards in this area can be divided into the following categories:

- ☐ Cross contamination
- ☐ Infection
- ☐ Hep C&B
- ☐ Other infectious conditions

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- ☐ All employees must use PPE (Personal Protection Equipment) this will consist of:
 - ☐ Safety boots with steel toecaps and mid-sole.
 - ☐ Two sets of latex gloves to be worn when handling plastics for collection or when left outside (Turtle skin gloves to be worn for sharps if encountered).
- ☐ Hepatitis B jabs to be provided at no cost to all staff.
- ☐ Blood and other body fluids (if encountered) are to be treated with an absorbent powder and then put into bio-hazard bags for incineration.
- ☐ On site risk assessment for plastics collection and sorting to be carried out before job begins, load specific hazards to be identified and controlled as needed.
- ☐ Accident report to be carried out should any injury occur.
- ☐ Suggested Specific Equipment to use if necessary is:
 - ☐ PPE, Tongs, Sharps Bins, plastic sheeting, latex gloves, rubber gloves, cardboard boxes, Bio Hazard bags safety boots with steel toecaps & mid-sole.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	70

4.24 Plastic shredding

HAZARDS

- Entrapment entanglement
- Manual Handling
- Electricity
- In running nips
- Fire

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- Shredder fully serviced and maintained as per manufacturer's instructions.
- All previous assessments regarding fire, manual handling, etc. to be followed.
- Machines may not be used if defects are significant.
- Emergency stop/bar and/or safety cut outs to be tested before use.
- Goggles must be worn during use.
- Gloves must be worn during use.
- Plastic beading is highly flammable, all sources of ignition to be kept away from area.
- Powder and foam extinguishers to be on hand during all shredding operations.
- Shredder prestart checks are demonstrated in accordance with manufacturer's instructions and company procedures and any servicing requirements are reported in accordance with company procedures.
- Preparation identifies and rejects unsuitable material.
- Shredding is totally enclosed so no debris is ejected.
- Operators are never to reach into machine.
- When operating shredder, wear close-fitting clothing, cuff-less gloves, cuff-less trousers, and safety boots with non-skid soles. Tie back your hair, take off jewelry, and keep your clothing tucked in. Keep your hands and feet outside the shredder at all times. Know what your co-workers are doing and where they are.
- Keep the work area around the shredder clear and free from tripping hazards to avoid falls into the hopper. Rake up small debris like crumb and place them directly into a bag for disposal.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	71

Logo here	ABC Company
	Safety Statement

- If the machine jams; DO NOT reach into the hopper. Stop the machine and only attempt to clear the jam when it is isolated and the knives have stopped rotating.

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	72

4.25 Conveyer

HAZARDS

- Entanglement
- Electricity
- Conveyers
- General machine hazards

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

CONTROL MEASURES

- All conveyers are covered by the general points in this assessment in addition to any specific points they may have.
- All conveyers required to have a pre use inspection checklist
- All defects are to be reported to the Production Manager as soon as they are noticed.
- All conveyers are service by external contractors; no parts are replaced or repaired by staff (other than oil, seals, etc).
- All conveyers have redundancy built into the production system to avoid the need for staff to try to repair breakdowns in an emergency.
- All conveyers are fitted with guards over moving parts, conveyer edges, chains, etc.
- All guards are interlocked and if opened the conveyers will stop.
- Emergency buttons are in place on various places on each conveyer/line.
- In-nip areas on conveyors are guarded
- Manual handling instruction provided for all operatives loading plastics.
- Emergency stop button installed in the machine and all operatives should be aware of its location.
- All power to the conveyer/line should be disconnected during maintenance and repair.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	73

4.26 Wash Plant Extruder


HAZARDS

- Entrapment entanglement
- Manual Handling
- Electricity
- In running nips
- Fire
- Slips and fall

RISK ASSESSMENT:

Likelihood	Severity	Risk Value
Score =	Score =	Result =

Typical layout for a rigid plastics washer extruder.

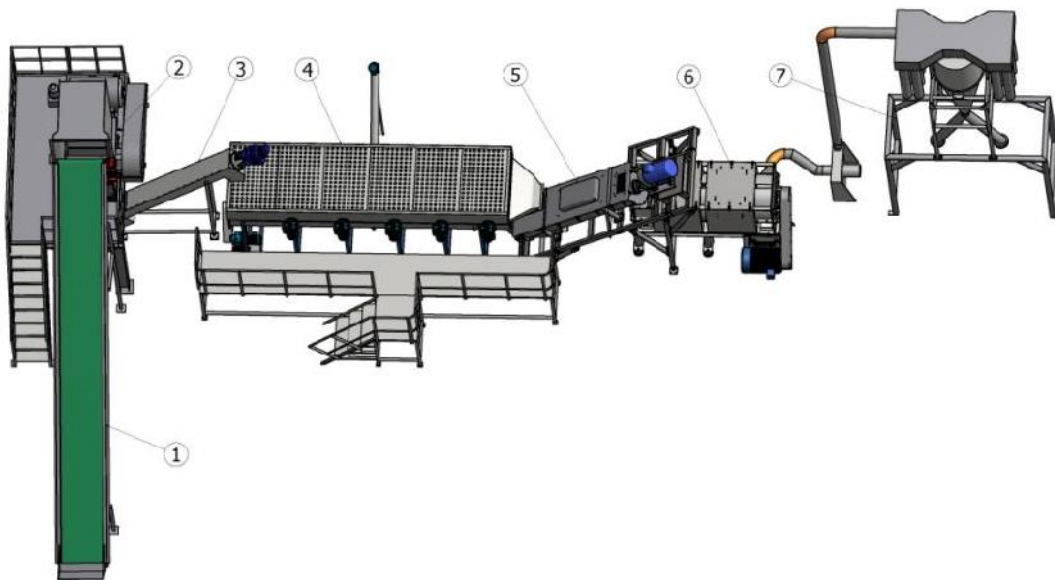

1. Conveyor with metal detector
2. Wet/Wash granulator
3. Friction washer

4. Swim-/Sink tank
5. Mechanical dryer
6. Thermal dryer
7. Big-Bag filling station

CONTROL MEASURES

- As per diagram no operator accessible areas.
- System is enclosed in so far as is practical in order to reduce possibility of ejection of material, entrapment, entanglement, etc. Washer/Extruder fully serviced and maintained as per manufacturer's instructions.
- Full machine is completely isolated from all energies when servicing/repair is required.
- Only fully qualified persons allowed to carry out servicing and repair.

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	74

Logo here	ABC Company
	Safety Statement

- All previous assessments regarding fire, manual handling, etc. to be followed.
- Machines may not be used if defects are significant.
- Emergency stop/bar and/or safety cut outs to be tested before use.
- All steps and gantries kept clear to avoid slips and falls.
- Full daily housekeeping inspection.

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	75

Logo here	ABC Company
	Safety Statement

PART 5

1. ANNUAL REPORT

ABC COMPANY

S A F E T Y S T A T E M E N T

The following is a report of progress with our Health and Safety Policy as required by Section 12(6) of the Safety Health and Welfare at Work Act 2005.

SAFETY TRAINING:

During the year, the following safety training courses were run:

- 1
- 2
- 3

External safety and health courses attended by our staff included:

- 1
- 2
- 3

NEW SAFETY ARRANGEMENTS

The following new safety arrangements were put in place during the year:

- 1
- 2
- 3

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	76

2. Safety Statement Document Review

ABC COMPANY

To ensure the proper implementation of our Safety Systems we shall review the Safety Statement periodically and at least annually.

Date of Review	Signed for Company	Description of Changes	Date of update

Part 6 Staff Sign Off

We the undersigned accept that:

- We have been shown the Safety Statement,
- We know where it is to be kept for review,
- We will adhere to all safety rules as set out by ABC Company
- We will not act in any way that could be harmful to ourselves or any other person.

Name in block	Signature	Date

Logo here	ABC Company
	Safety Statement

Appendix

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	79

Logo here	ABC Company
	Safety Statement

Accident Report Form

Location:	Department:
Date of Accident / Incident:	Date of Review:
Management present:	
Injured Party Details	

Nature of loss	Nature and extent of actual or potential loss to people, property, process or the environment
Description	Description of the Accident / Incident (who, what, how, when)
Causes	Why did the Accident / Incident occur, (root, basic and immediate causes)?
Recommendations	Action to prevent recurrence, responsibility & action by dates:
Reporting	Distribution of investigation information organisation wide and statutory reporting / reply:

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	80

Logo here	ABC Company
	Safety Statement

Staff Suggestion forms

SECTION A: To be completed by staff member with suggestion

Staff Member Name:_____	Position:_____
Date:_____	

Details of Suggestion:

SECTION B: to be completed by Supervisor or ABC Company

Action Taken:

Signature:_____

Date_____

Logo here

ABC Company Safety Statement

Forklift Pre Use Inspection from the HSA



Forklift Truck Operator Pre-Use Checks



Visual Checks

- General Condition.
- Forks.
- Carriage Plate.
- Mast.
- Back Rest Extension / Load Guard.
- Lift Chains.
- Tyres.
- Wheels.
- Overhead Guard / Roll Over Protection Frame.
- Energy Source.
- Hydraulics.
- Identification / Rating Plate.
- Operator's Compartment.
- Access.
- Lights, Windscreen and Mirrors (if fitted).
- Fire Extinguisher (if fitted).

Working Environment

- No evidence of leaks.
- No obstructions (overhead or in working area).
- Correct forklift type for working environment.

Practical / Operational Checks

- Seat.
- Safety Belt.
- Ignition and Electrical Systems.
- Reversing Alarm and Horn.
- Warning Lights and Lights (if fitted).
- Hydraulic Controls.
- Brakes (Foot & Parking).
- Clutch and Gearshift.
- Steering.
- Exhaust.
- Noise.

Thorough Examination

- Thorough examination carried out every 12 months (every 6 months if used to lift persons) by a competent person and test certificate available.

If used on the Public Road

- Forklift truck registered and number plate (front and rear) displayed, clean and legible.
- Valid tax and insurance disc displayed.
- Road lights (side, head, rear, stop and number plate lights) in place, clean, correct colour and working correctly.

Note: Head, stop and direction indicator lights are not required if the truck cannot exceed 12 miles per hour (19 Kilometres per hour) provided that the driver is clearly visible on all sides, can give hand signals to other traffic and the vehicle is not used during lighting-up hours except in an adequately lit public place.

Logo here

ABC Company Safety Statement

Forklift Truck Operator Pre-Use Checks



Vehicle Serial / Identification Number _____

Check Items

✓ OK ✗ DEFECT

Visual Checks

- | | | |
|----|---|--------------------------|
| 1 | General: Good condition with no damage, excessive dirt or rust. Any defects previously noted repaired. | ☐ |
| 2 | Forks: Correctly positioned, not damaged, cracked, bent or worn. Anchor pins secure and not worn, loose or bent. | ☐ |
| 3 | Carriage Plate: No damage or distortion, sitting square to the mast and lubricated. End stop bolts engaged and secure. | ☐ |
| 4 | Mast: No damage, distortion or cracks. No undue wear, scoring, dirt or foreign bodies in channels. End stops secure. Rollers, no uneven wear or incorrect tracking. Slides intact and secure. | ☐ |
| 5 | Back Rest Extension / Load Guard: In good condition, secure with no distortion or cracks. | ☐ |
| 6 | Lift Chains: Not damaged worn or stretched, no broken links or rust. All pins in place. | ☐ |
| 7 | Tyres: No damage, excessive dirt or wear, rust, cracks, splits or separation of tyres and rims. Pneumatic tyres correct air pressure. | ☐ |
| 8 | Wheels: Undamaged and free from obstruction and debris. All nuts secure and in place. | ☐ |
| 9 | Overhead Guard / Roll Over Protection Frame: Secure, undamaged with no loose items. | ☐ |
| 10 | Energy Source: <ul style="list-style-type: none">• Gas or Diesel: Engine oil, fuel and radiator water level correct. Gas bottle secured, no rust, corrosion or damaged pipes, hoses or seals.• Electric: Electrolyte level, battery plug and connections correct. Power cable intact, connected and secure. No exposed wires, battery brackets secure and battery adequately charged. | ☐ |
| 11 | Hydraulics: No damage or fluid leaks, no splits in hoses, no leaks around fittings. | ☐ |
| 12 | Identification / Rating Plate: Intact, clean and legible. | ☐ |
| 13 | Operator's Compartment: Clean with no loose items. | ☐ |
| 14 | Access: Steps and grab handles in good condition and clean. | ☐ |
| 15 | Lights, Windscreen and Mirrors (if fitted): Clean and undamaged. | ☐ |
| 16 | Fire Extinguisher (if fitted): Secure and charged. | ☐ |

Operational Checks

- | | | |
|----|---|--------------------------|
| 17 | Seat: Good condition, secure and adjusted correctly. | ☐ |
| 18 | Safety Belt: Accessible, in good condition and working correctly. | ☐ |
| 19 | Ignition & Electrical System: Working correctly. All gauges and instruments visible and working. | ☐ |
| 20 | Reversing Alarm and Horn: Working correctly and audible. | ☐ |
| 21 | Warning Lights & Lights (if fitted): Working correctly. | ☐ |
| 22 | Hydraulic Controls: Working smoothly and correctly. | ☐ |
| 23 | Brakes (Foot & Parking): Working correctly. | ☐ |
| 24 | Clutch & Gearshift: Working smoothly and correctly. | ☐ |
| 25 | Steering: Working correctly with no excessive play. | ☐ |
| 26 | Exhaust: No excessive smoke, sparks or flames. | ☐ |

Defect Details

Operator's Signature _____

Date _____

Manager's / Supervisor's Signature _____

Date _____

Note: This is a sample operator pre-use forklift truck checklist. It is recommended that employers prepare their own operator pre-use checklists, taking account of the manufacturer's recommendations, the type and use of their own forklift trucks.

Logo here	ABC Company
	Safety Statement

PART 8 Related Policies

8.1 ABC Company Environmental Policy Statement

ABC Company will seek to promote the conservation and sustainable use of natural resources and to minimise environmental pollution in all their activities and, where possible, by it's influence over others. The objective will be to minimise the environmental impact of all operations.

Consideration will be given to substitution of polluting substances with "greener" alternatives wherever possible. Steps will be taken to minimise smoke, dust, noise, and vibration nuisance - the potential for which will be identified during the assessment process.

All waste disposals shall be carried out by registered carriers and removed to registered disposal sites. Documentation shall be held to demonstrate compliance with this. Wherever possible waste shall be recycled, reclaimed or reused.

Liquid pollutants will not be allowed to enter watercourses. All liquid storage will be bunded wherever there is a risk.

This policy will be enforced by managerial vigilance and shall be subject to regular auditing and review.

PREVIEW

Logo here	ABC Company
	Safety Statement

8.2 ABC Company Equality Policy

ABC Company are an equal opportunities Employer & thus, as laid out in this policy, seek to comply with all legal regulations & directives with regard to dealing with individuals or groups in a fair & legal way.

It is the policy of ABC Company to deal (employ, pay, consult, interview, speak to, and write to etc.) with any person/s equally & with dignity Regardless of disposition:

- Gender
- Race
- Colour
- Creed (Religious Persuasion)
- Nationality
- Disability or Physical Impairment
- Financial Status

ABC Company, its Management and Staff must uphold & comply with this policy. Failure to comply with this policy could result in immediate disciplinary action & possible dismissal.

Should any person cause harm, harass, sexually harass or disadvantage any of the above because of their disposition, that person/s will be reported to the Authorities & will be dealt with on a legal basis.

It is the overall policy of this company to practice equality & to be fair to all.

Logo here

ABC Company
Safety Statement

PREVIEW

Revision number	Date	Document owner	Approved by	Page number
01	xx/xx/xx	Manager 1	Manager 2	87